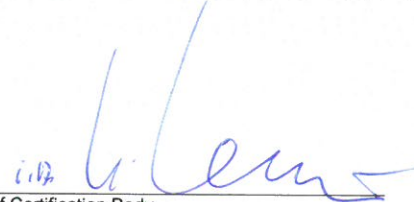


EU type examination certificate
EU-Baumusterprüfbescheinigung

CE-0085CN0379
 Product Identification No.
 Produkt-Identnummer

Field of Application <i>Anwendungsbereich</i>	EU Gas Appliances Regulation (EU/2016/426) <i>EU-Gasgeräteverordnung (EU/2016/426)</i>
Owner of Certificate <i>Zertifikatinhaber</i>	Copreci S. Coop. Araba Ibilbidea, 3, E-20550 Aretxabaleta/Guipuzcoa
Distributor <i>Vertreiber</i>	Copreci S. Coop. Araba Ibilbidea, 3, E-20550 Aretxabaleta/Guipuzcoa
Product Category <i>Produktart</i>	accessories for gas appliances/pressure equipment: Multi functional control (4104)
Product Description <i>Produktbezeichnung</i>	multi functional control consisting of manually operated tap and thermoelectric flame failure device for gas appliances for cooking, baking and grilling
Model <i>Modell</i>	CAL 24300/159; CAL 24300/164
Countries of Destination <i>Bestimmungsländer</i>	AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MT, NL, NO, PL, PT, RO, SE, SI, SK
Test Reports <i>Prüfberichte</i>	type testing: 17/359/4109/400 from 23.11.2018 (EBI)
Test Basis <i>Prüfgrundlagen</i>	EU/2016/426 A III B (09.03.2016) DIN EN 126 (01.06.2012)

Date of Expiry / File No. 29.11.2028 / 18-0844-GEA
Ablaufdatum / AZ

29.11.2018 Rie A-1/2 
 Date, Issued by, Sheet, Head of Certification Body
 Datum, Bearbeiter, Blatt, Leiter der Zertifizierungsstelle

DVGW CERT GmbH is an accredited body by DAkkS according to DIN EN ISO/IEC 17065:2013 and notified by the government of the Federal Republic of Germany for certification of gas appliances under EU Regulation

DVGW CERT GmbH ist von der DAkkS nach DIN EN ISO/IEC 17065:2013 akkreditierte und von der Deutschen Bundesregierung benannte Stelle für die Zertifizierung von Gasgeräten gemäß EU-Verordnung EU/2016/426.



DVGW CERT GmbH
 Zertifizierungsstelle
 Josef-Wirmer-Str. 1-3
 53123 Bonn
 Tel. +49 228 91 88 - 888
 Fax +49 228 91 88 - 993
 www.dvgw-cert.com
 info@dvgw-cert.com

Gas Category <i>Gasart</i>	Remarks <i>Bemerkungen</i>
fuel gases of the 1., 2. & 3. gas family	

Type <i>Typ</i>	Technical Data <i>Technische Daten</i>	Remarks <i>Bemerkungen</i>
CAL 24300/159; CAL 24300/164	ambient temperature range: 0...+150 °C max. operating pressure: 65 mbar	

Type Variation <i>Ausführungsvariante</i>	Explanations <i>Erläuterungen</i>
CAL 24300/159	spindle length: 52,2 mm
CAL 24300/164	spindle length: 44,3 mm

Hints of Utilization /Remarks <i>Verwendungshinweise / Bemerkungen</i>
connection: at the input side clamping screw connection for outside pipe diameter 16 mm, at the outlet sides double-cone-ring-screw joint (with union screw) group: 2

DVGW