



COPRECI S. COOP.
 Avda. de Álava 3
 E-20550 Aretxabaleta Guipúzcoa - SPAIN
 Tel:+ 34 943 71 94 99
 Fax:+ 34 943 79 23 49
 home@copreci.es

COPRECI DE MEXICO, SA DE CV
 C/ Uno, nº 736 Z.I. Guadalajara
 44940 Jalisco - MEXICO
 Tel:+ 52 33 3 145 19 63
 Fax:+ 52 33 3 145 10 56

COPRECI DO BRASIL, LTDA.
 Av. Eurico Ambrogi Santos, 1900 A
 Distrito Industrial Piracangagua CEP 12010-970
 Taubaté SP - BRAZIL
 Tel:+ 55 12 3627-7200
 Fax:+ 55 12 3627-7201

COPRECI CZ, S.R.O.
 Komenského 274 79368
 Dvorce u Bruntálu - CZECH REPUBLIC
 Tel:+ 420 554 773 420
 Fax:+ 420 554 773 446

COPRECI SYSTEMS, S.R.L.
 Centrale: Via G. Galilei, 12 31010
 Mareno di Piave (TV) - ITALY
 Tel:+ 39 0438492531
 Fax:+ 39 0438492559

COPRECI TR.LTD.STI.
 GEPOSB Cumhuriyet Caddesi, 6 cadde.
 Gebze-Kocaeli - TURKEY
 Tel:+ 90 262 751 13 34
 Fax:+ 90 262 751 42 56

COPRECI CHINA
 South Side of Jinhai Road, Middle Section
 Sanzao Hi-Tech Industrial Park
 519040 Zhuhai - CHINA
 Tel:+ 86 (0) 756 399 72 66/67/68
 Fax:+ 86 (0) 756 399 72 69

www.copreci.com
www.green-induction.com
www.safeandsmartcooking.com



PROFESSIONAL COOKING 



experts in professional cooking since 1963 



"Copreci has been designing components for catering equipment for forty years"

50 years making and developing components for catering equipment make us experts in the professional gas cooking sector.

Since then, we have launched **more than 50 different range of products**, from gas valves to electronic control systems for gas grills, each one being more reliable and efficient than the previous one.

We have developed **new features** with the end customer in mind, catering for their **convenience and safety**, improving the way they look. We have focused not only on their purpose, but also on their **cost** and on a more flexible and ecological design.

Thanks to this track record, we can provide the market's most advanced professional cooking product range, the one most suited to your needs and to your customers' expectations.



Behind each product there is a team of professionals who are **already working** on the next product

a smart way of cooking 

"We believe in innovation,
and we look for a smart
way of cooking "



We are always looking for a smart way of cooking taking into account our customers requirements.

We manufacture reliable, state of the art products, thus creating a leading position in our sector. Our R&D department works closely with our partners in order to develop products and applications that fulfil the latest international standards.

Our technical and sales department offers high quality consulting services concerning to the final application, its production, manufacturing and application in the final product.

The motor that drives Copreci is the experience of "living for the customer"; closely monitoring their needs by creating cutting-edge products that cater for the demands of the manufacturers and end users.



Copreci's thermoelectric safety gas taps are manufactured to the following European standards: EN-125, EN-126, EN-161 and are CE and CSA approved.



we care for professional cooking all over the
world

"Copreci's right there
inside, where no-one can
see, but you can feel it....
making sure that
everything works in perfect
harmony..."



Our engineering team is always thinking of new ways to make safety components safer, taking into account the specific cooking habits of each country, and to meet your specific needs.

Because we are there, in the soul of the domestic appliance, providing intangible added value, which goes straight to the user's heart.

International projection

Expansion at Copreci is heading in the direction marked out by the customer. This has led to the international projection of our operations, this is the reason why we have different production centres in countries such as Mexico, Brazil, China, Turkey, Czech Republic and Italy. We take all our service potential to wherever our customers may be.

Sustainability

At Copreci, we take seriously our commitment to the environment. We conduct our business in ways that protect the environment and demonstrate good stewardship of our world's natural resources. We work closely and cooperatively with local communities, suppliers and contractors, and other organizations engaged in improving the environment. And we continually seek new ways to address the environmental cost and impact of our activities, products and services.



a wide range of components



Gas taps

Copreci's gas valves are specifically designed to be fitted in all types of catering equipments, to control a wide range of burners and for all types of gas.



Thermoelectric safety gas valves Copreci's thermoelectric gas valves are specifically designed to be fitted in all types of catering equipments, to control a wide range of burners and for all types of gas.



Push-button safety valve

These push button safety valves are specifically designed to be fitted in all types of catering equipments, to control a wide range of burners and for all types of gas.



Safety thermostat

These thermostats are male cone thermostats fitted with a thermoelectric safety device. They offer a wide range of possibilities to the many requirements of professional cookers and built-in ovens manufacturers.



Millivolt valve

These millivolt valves are a new concept in valves for gas applications, as it offers the maximum features in a minimum space.

Thanks to its reduced design, it can be easily adapted to any type of application or configuration. It can also be fitted in different positions.



Pilots

These pilots have been designed for use with the most demanding burners.

- With 1, 2, and 3 flames.
- With or without ignition spark.
- Suitable for various pressures and type of gas.
- Thermopile version to power the millivolt valve.

Gas taps

CAM 23800 series 5-8 kW



These valves designed by Copreci offer the most complete range of possibilities and are capable of responding to the many requirements of professional gas cooking appliances.

Copreci's gas valves are specifically designed to be fitted in all types of catering equipments, to control a wide range of burners and for all types of gas.

Optional characteristics

- With 3 ways: gas inlet + burner outlet + pilot outlet.
- With/without pilot outlet.

Standards and approvals

Copreci's thermoelectric safety gas taps are manufactured to the following European standards: EN-125, EN-126, EN-161 and are CE and CSA approve

Other characteristics

- Max. ambient temperature: 150 °C (300 °F)
- Maximum gas pressure:
 - > CE 50 mbar.
 - > CSA 1/2 psi
- Adjustable by-pass for each type of gas.

Power

Power in KW		Power in Btu/h	
LPG	NG	LPG	NG
G-30 / G-31	G-20		
30 / 37 mbar	20 mbar	11" W.C.	3,5" W.C.
23 KW	11 KW	64.000 Btu/h	40.000 Btu/h

Applications



fryer



oven



griddle



broiler



range




bbq



Gas taps

CAM 23900 series 5-8-11-22 kW

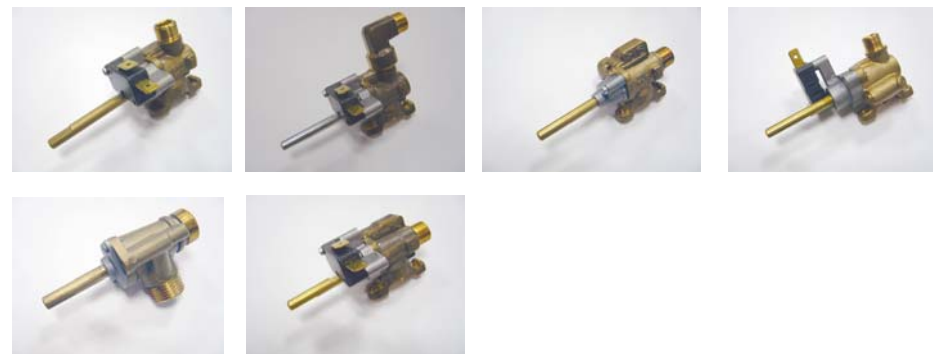

These valves designed by Copreci offer the most complete range of possibilities and are capable of responding to the many requirements of professional gas cooking appliances.

Copreci's gas valves are specifically designed to be fitted in all types of catering equipments, to control a wide range of burners and for all types of gas.

Optional characteristics

- 3 ways: gas inlet + burner outlet + pilot outlet.
- With/without pilot outlet.
- With microswitch.

Standards and approvals

Copreci's valves are manufactured to the following European standards: EN-125, EN-126, EN-161 and are CE and CSA approve

Other characteristics

- Max. ambient temperature: 150 °C (300 °F).
- Maximum gas pressure:
 - > CE: 50 mbar
 - > CSA: 1/2 psi
- Adjustable by-pass for each type of gas.

Power

Power in KW		Power in Btu/h	
LPG	NG	LPG	NG
G-30 / G-31	G-20		
30 / 37 mbar	20 mbar	11" W.C.	3,5" W.C.
46 KW	22 KW	160.000 Btu/h	100.000 Btu/h

Applications



fryer



oven



griddle



broiler



range



bbq



Gas taps

CAM 49300 series 5-8 kW



These valves designed by Copreci offer the most complete range of possibilities and are capable of responding to the many requirements of professional gas cooking appliances.

Copreci's gas valves are specifically designed to be fitted in all types of catering equipments, to control a wide range of burners and for all types of gas.

Optional characteristics

- With 3 ways: gas inlet + burner outlet + pilot outlet.
- With/without pilot outlet.

Other characteristics

- Max. ambient temperature: 150 °C (300 °F)
- Maximum gas pressure:
 - > CE 50 mbar.
 - > CSA 1/2 psi
- Adjustable by-pass for each type of gas.

Power

Power in KW		Power in Btu/h	
LPG	NG	LPG	NG
G-30 / G-31	G-20		
30 / 37 mbar	20 mbar	11" W.C.	3,5" W.C.
23 KW	11 KW	64.000 Btu/h	40.000 Btu/h

Applications



fryer




oven



griddle



broiler



range



bbq



Gas tap

CAM 24500 series 5-8-11-22 kW



These valves designed by Copreci offer the most complete range of possibilities and are capable of responding to the many requirements of professional gas cooking appliances.

Copreci's gas valves are specifically designed to be fitted in all types of catering equipments, to control a wide range of burners and for all types of gas.

Optional characteristics

- With/without thermoelectric safety device.
- 3 ways: gas inlet + burner outlet + pilot outlet.
- With/without pilot outlet.

Other characteristics

- Max. ambient temperature: 150 °C (300 °F).
- Maximum gas pressure:
 - > CE: 50 mbar
 - > CSA: 1/2 psi
- Adjustable by-pass for each type of gas.

Power

Power in KW		Power in Btu/h	
LPG	NG	LPG	NG
G-30 / G-31	G-20		
30 / 37 mbar	20 mbar	11" W.C.	3,5" W.C.
46 KW	22 KW	160.000 Btu/h	100.000 Btu/h

Applications



fryer



oven



griddle



broiler



range



bbq



Safety Valves

CAL 24200 series 5-8-11 kW



These valves designed by Copreci offer the most complete range of possibilities and are capable of responding to the many requirements of professional gas cooking appliances.

Copreci's gas valves are specifically designed to be fitted in all types of catering equipments, to control a wide range of burners and for all types of gas.

Optional characteristics

- With 3 ways: gas inlet + burner outlet + pilot outlet.
- With/without pilot outlet.

Other characteristics

- Max. ambient temperature: 150 °C (300 °F)
- Maximum gas pressure:
 - > CE 50 mbar.
 - > CSA 1/2 psi
- Adjustable by-pass for each type of gas.

Power

Power in KW		Power in Btu/h	
LPG	NG	LPG	NG
G-30 / G-31	G-20		
30 / 37 mbar	20 mbar	11" W.C.	3,5" W.C.
23 KW	11 KW	64.000 Btu/h	40.000 Btu/h

Applications



fryer



oven



griddle



broiler



range



bbq



Safety Valves

CAL 24300 series 5-8 -11-23 kW



These valves designed by Copreci offer the most complete range of possibilities and are capable of responding to the many requirements of professional gas cooking appliances.

Copreci's gas valves are specifically designed to be fitted in all types of catering equipments, to control a wide range of burners and for all types of gas.

Optional characteristics

- With/without thermoelectric safety device.
- 3 ways: gas inlet + burner outlet + pilot outlet.
- With/without pilot outlet.

Other characteristics

- Max. ambient temperature: 150 °C (300 °F).
- Maximum gas pressure:
 - > CE: 50 mbar
 - > CSA: 1/2 psi
- Adjustable by-pass for each type of gas.

Power

Power in KW		Power in Btu/h	
LPG	NG	LPG	NG
G-30 / G-31	G-20		
30 / 37 mbar	20 mbar	11" W.C.	3,5" W.C.
46 KW	22 KW	160.000 Btu/h	100.000 Btu/h

VALVE WITH LED

Standards and approvals

Copreci's valves are manufactured to the following European standards: EN-125, EN-126, EN-161 and are CE and CSA approve

Applications



fryer



oven



griddle



broiler



range



bbq



Safety Valve

CPMM 18700 series 5-8 kW



These valves designed by Copreci offer the most complete range of possibilities and are capable of responding to the many requirements of professional gas cooking appliances.

Copreci's gas valves are specifically designed to be fitted in all types of catering equipments, to control a wide range of burners and for all types of gas.

Optional characteristics

- With/without thermoelectric safety device.
- With 3 ways: gas inlet + burner outlet + pilot outlet.
- With/without pilot outlet.

Other characteristics

- Max. ambient temperature :150 °C (300 °F).
- Maximum gas pressure:
 - > CE 50 mbar.
 - > CSA 1/2 psi
- Adjustable by-pass for each type of gas.

Power

Power in KW		Power in Btu/h	
LPG	NG	LPG	NG
G-30 / G-31	G-20		
30 / 37 mbar	20 mbar	11" W.C.	3,5" W.C.
23 KW	11 KW	64.000 Btu/h	40.000 Btu/h

Applications



fryer



oven



griddle



broiler



range



bbq



Safety Valve

CAL 3200 series 11-22 kW



These valves designed by Copreci offer the most complete range of possibilities and are capable of responding to the many requirements of professional gas cooking appliances.

Copreci's gas valves are specifically designed to be fitted in all types of catering equipments, to control a wide range of burners and for all types of gas.

Optional characteristics

- With/without thermoelectric safety device.
- 3 ways: gas inlet + burner outlet + pilot outlet.
- With/without pilot outlet.

Other characteristics

- Max. ambient temperature:150 °C (300 °F).
- Maximum gas pressure:
 - > CE: 50 mbar
 - > CSA: 1/2 psi
- Adjustable by-pass for each type of gas.

Power

Power in KW		Power in Btu/h	
LPG	NG	LPG	NG
G-30 / G-31	G-20		
30 / 37 mbar	20 mbar	11" W.C.	3,5" W.C.
46 KW	22 KW	160.000 Btu/h	100.000 Btu/h

Applications



fryer



oven



griddle



broiler



range



bbq



Safety Valves

CAL 5200 series & CAL 20703 series

5-6,5 kW



These valves designed by Copreci offer the most complete range of possibilities and are capable of responding to the many requirements of professional gas cooking appliances.

Copreci's gas valves are specifically designed to be fitted in all types of catering equipments, to control a wide range of burners and for all types of gas.

Optional characteristics

- With/without thermoelectric safety device.
- 3 ways: gas inlet + burner outlet + pilot outlet.
- With/without pilot outlet.

Other characteristics

- Max. ambient temperature: 150 °C (300 °F).
- Maximum gas pressure:
 - > CE: 50 mbar
 - > CSA: 1/2 psi
- Adjustable by-pass for each type of gas.

Power

Power in KW		Power in Btu/h	
LPG G-30 / G-31	NG G-20	LPG	NG
30 / 37 mbar	20 mbar	11" W.C.	3,5" W.C.
46 KW	22 KW	160.000 Btu/h	100.000 Btu/h

Standards and approvals

Copreci's valves are manufactured to the following European standards: EN-125, EN-126, EN-161 and are CE and CSA approve

Push-bottom safety valve

T-25, T-15, T-10 series

8-11-22 kW



T-10



T-15



T-25

These valves designed by Copreci offer the most complete range of possibilities and are capable of responding to the many requirements of professional gas cooking appliances.

Copreci's gas valves are specifically designed to be fitted in all types of catering equipments, to control a wide range of burners and for all types of gas.

Optional characteristics

- 1 or 2 outlets.
- High pressure version.

Other characteristics

- Maximum ambient temperature: 150°C (300°F).
- Maximum gas pressure:
 - > CE: 50 mbar
 - > CSA: 1/2 psi

Power

	Power in KW		Power in Btu/h	
	LPG G-30 / G-31	NG G-20	LPG	NG
	30 / 37 mbar	20 mbar	11" W.C.	3,6" W.C.
T-25	52 KW	25 KW	160.000 Btu/h	100.000 Btu/h
T-15	25 KW	12 KW	60.000 Btu/h	40.000 Btu/h
T-10	17 KW	8 KW	56.000 Btu/h	30.000 Btu/h

Applications



fryer




oven



griddle



broiler



range



bbq



Applications



fryer



oven



griddle



broiler



range



bbq



Safety Thermostat

MT/ MTZ 22300 series 5,5 kW

MT/ MTZ 7200 series 8 kW



The MT/MTZ 22300 series thermostats offer a wide range of possibilities and are capable of responding to the many requirements of professional cookers and built-in ovens manufacturers.

These are male cone thermostats fitted with a thermoelectric safety device. They have been approved by the main institutes specialising in that area.

The MT/MTZ 7200 series thermostats offer a wide range of possibilities and are capable of responding to the many requirements of professional cookers and built-in ovens manufacturers.

These are male cone thermostats fitted with a thermoelectric safety device. They have been approved by the main institutes specialising in that area.

other characteristics

- MT series: 2 ways (gas inlet + burner outlet).
- MTZ series: 3 ways (gas inlet + burner outlet + grill/pilot outlet).

Other characteristics

- Maxi. ambient temperature: 150 °C (300 °F).
- Maximum gas pressure: > CE: 50 mbar
- Adjustable by-pass for each type of gas.

Power

Power in KW		Power in Btu/h	
LPG	NG	LPG	NG
G-30 / G-31	G-20	11" W.C.	3,5" W.C.
30 / 37 mbar	20 mbar		
11 KW	5,5 KW	35.000 Btu/h	22.000 Btu/h

Power in KW		Power in Btu/h	
LPG	NG	LPG	NG
G-30 / G-31	G-20	11" W.C.	3,5" W.C.
30 / 37 mbar	20 mbar		
17 KW	8 KW	55.000 Btu/h	36.000 Btu/h

Standards and approvals

Copreci's thermoelectric safety gas taps are manufactured to the following European standards: EN-125, EN-126, EN-161 and are CE

Other characteristics

- Maxi. ambient temperature: 150 °C (300 °F).
- Maximum gas pressure: > CE: 50 mbar > CSA: 1/2 psi
- Adjustable by-pass for each type of gas.

Pilots

P-23300 series



With thermopile / con termopila.

The 23300 series pilots offer a wide range of possibilities, capable responding to the multiple requirements of the INDUSTRIAL COOKING sector.

These pilots have been designed for use with the most demanding burners.

Optional characteristics

- With 1, 2, and 3 flames.
- With or without ignition spark.
- Suitable for various pressures and type of gas.
- Thermopile version to power the millivolt valve.

Other characteristics

- Max. ambient temperature: 150 °C (300 °F).


Power

Power in KW		Power in Btu/h	
LPG	NG	LPG	NG
G-30 / G-31	G-20	11" W.C.	3,5" W.C.
30 / 37 mbar	20 mbar		
17 KW	8 KW	55.000 Btu/h	36.000 Btu/h

Standards and approvals

Copreci's thermoelectric safety gas taps are manufactured to the following European standards: EN-125, EN-126, EN-161 and are CE

Applications

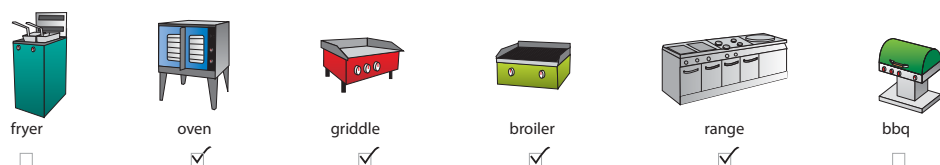

fryer

oven


griddle

broiler

range

bbq

Applications

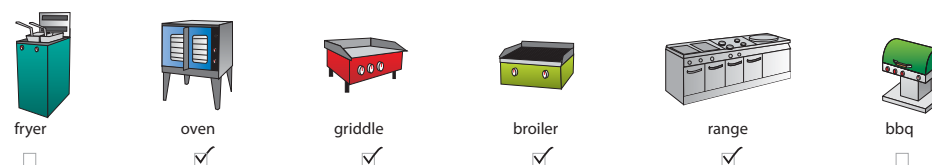

fryer

oven

griddle

broiler

range

bbq

Solenoid valve

VmV 23500 series



VmV 23500 for thermopile/ para termopila



VmV 23500 for direct current between 1,5 and 5 Vcc / con corriente continua

The VmV 23500 series valve is a new concept in valves for gas applications, as it offers the maximum features in a minimum space.

Thanks to its reduced design, it can be easily adapted to any type of application or configuration. It can also be fitted in different positions.

It is a revolutionary modular valve that can be quickly assembled with any of our safety valves (T10, CPMM or LOG Valves).

Optional characteristics

- With thermopile or direct current.
- With pressure tap option.

Other characteristics

- Max. ambient temperature: 80 °C (176 °F).
- Maximum gas pressure:
 - > CE: 50 mbar
 - > CSA: 1/2 psi

Power

Power in KW		Power in Btu/h	
LPG	NG	LPG	NG
G-30 / G-31	G-20		
30 / 37 mbar	20 mbar	11" W.C.	3,5" W.C.
46 KW	22 KW	130.000 Btu/h	85.000 Btu/h

Standards and approvals

Copreci's safety thermostats are manufactured to the following European standards: EN-125, EN-126, EN-161 and are CE approved.

Solenoid valve

skt 23700 series



The SKT 23700 series is a multifunctional gas valve with a built in regulator, that can be used in a wide range of applications such as wall heaters, RV heaters, gas clothes dryers, radiant heaters, cooking appliances,...

There are different configurations that include: valve with pilots, redundant safety, for dual burners and with high-low output.

Characteristics

Voltage	Frequency
120 V	60 Hz
240 V	50 Hz

Power

Power in Btu/h	
LPG	NG
11" W.C.	3,5" W.C.
38.000 Btu/h	22.000 Btu/h

Other characteristics

- Max. ambient temperature: 150 °C (300 ° F).
- Maximum gas pressure: 65 mbar.
- **Patent pending** dual gas conversion system where the kit is built into the valve (only need to change the orifice).

Applications



fryer



oven



griddle



broiler



range



bbq



Applications



fryer



oven



griddle



broiler



range



bbq



General Specifications



MODEL SERIES	3200 CAL	3200 CAL	3200 CAL	3200 CAL	3200 CAL	18700 CPPM	18700 CPPM	18700 CPPM	18700 CPPM	5200 CAL	20703 CAL	
CHARACTERISTICS												
Safety device	•	•	•	•	•	•	•	•	•	•	•	•
Burner outlet	•	•	•	•	•	•	•	•	•	•	•	•
Pilot outlet	optional	optional	optional	optional	optional	optional	optional	optional	optional	optional	optional	
POWER												
LPG (KW)	46	46	46	46	46	23	23	23	23	??	??	
NG (KW)	22	22	22	22	22	11	11	11	11	6,5	5	
LPG (Btu/h)	160,000	160,000	160,000	160,000	160,000	64,000	64,000	64,000	64,000			
NG (Btu/h)	100,000	100,000	100,000	100,000	100,000	40,000	40,000	40,000	40,000			
STANDARDS & APPROVALS												
EN 125, EN-126, EN-161	•	•	•	•	•	•	•	•	•	•	•	•
CSA	•	•	•	•	•	•	•	•	•	•	•	•
APPLICATIONS												
Ranges 	•	•	•	•	•	•	•	•	•	•	•	•
Tabletops 	•	•	•	•	•	•	•	•	•	•	•	•
Fryers 	•	•	•	•	•	•	•	•	•	•	•	•
Ovens 	○	○	○	○	○	○	○	○	○	○	○	○



MODEL SERIES	608 GH	660 GH	661 GH	675 GH	676 GH	18700 CPPM	18700 CPPM	18700 CPPM	18700 CPPM	5200 CAL	20703 CAL	
CHARACTERISTICS												
Safety device	•	•	•	•	•	•	•	•	•	•	•	•
Burner outlet	•	•	•	•	•	•	•	•	•	•	•	•
Pilot outlet	•	optional	optional	optional	optional	optional	optional	optional	optional	optional	optional	
POWER												
LPG (KW)	46,8	13,3	33,5	8	46	23	23	23	23	??	??	
NG (KW)	13	6,3	16	4,8	22	11	11	11	11	6,5	5	
LPG (Btu/h)	44,700	45,700	115,000	27,300	160,000	64,000	64,000	64,000	64,000			
NG (Btu/h)	21,300	21,700	55,000	16,400	100,000	40,000	40,000	40,000	40,000			
STANDARDS & APPROVALS												
EN 125, EN-126, EN-161	•	•	•	•	•	•	•	•	•	•	•	•
CSA	•	•	•	•	•	•	•	•	•	•	•	•
APPLICATIONS												
Ranges 	•	•	•	•	•	•	•	•	•	•	•	•
Tabletops 	•	•	•	•	•	•	•	•	•	•	•	•
Fryers 	•	•	•	•	•	•	•	•	•	•	•	•
Ovens 	○	○	○	○	○	○	○	○	○	○	○	○

Adjustable bypass jet
Number of outlets